

Rec'd PCT/PTO 25 MAR 2003
PCT/GB 2003 / 004168



INVESTOR IN PEOPLE

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 30 OCT 2003

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Stephen Hordley

Dated 15 October 2003

Best Available Copy



26SEP02 E751196-1 D02973
P01/7700 0.00-0222342.8

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

P100916GB

2. Patent application number

(The Patent Office will fill in this part)

0222342.8

26 SEP 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

British Nuclear Fuels Plc
Risley
WARRINGTON
Cheshire
WA3 6AS

6 350108001

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

Surface Treatment of Concrete

5. Name of your agent (if you have one)

Harrison Goddard Foote

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Orlando House
11c Compstall Road
Marple Bridge
Stockport SK6 5HH
United Kingdom

Patents ADP number (if you know it)

14571002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Yes

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

| | |
|-------------|-------|
| Description | 22 |
| Claim(s) | 5 |
| Abstract | 1 DM |
| Drawing(s) | 3 + 3 |


10. If you are also filing any of the following, state how many against each item.

| | |
|--|-----|
| Priority documents | 0 |
| Translations of priority documents | 0 |
| Statement of inventorship and right to grant of a patent (Patents Form 7/77) | 0 |
| Request for preliminary examination and search (Patents Form 9/77) | 0 1 |
| Request for substantive examination (Patents Form 10/77) | 0 |
| Any other documents (please specify) | 2 |

Covering letter and fee sheet ✓

11.

I/We request the grant of a patent on the basis of this application.

| | |
|---|-----------|
|  | 25/9/02 |
| Signature | Date |
| Harrison Goddard Foote | 25/9/2002 |

12. Name and daytime telephone number of person to contact in the United Kingdom

David Goddard

0161 427 7005

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Surface treatment of Concrete

5 Field of the invention . .

The present invention concerns surface removal from inorganic non-metallic structures, in particular concrete structures, primarily though not exclusively for the
10 purpose of removing radioactive contamination contained in surface layers.

Discussion of the Prior art

15 In the nuclear industry surfaces of concrete structures may become contaminated with radionuclides. Common contaminants include uranium oxide, plutonium oxide, strontium-90, caesium-137 and cobalt-60. Typically this contamination is only present in a surface layer of concrete. Such layers
20 may be around 1 to 4mm thick. By removal of such a surface layer the degree of contamination of a surface and of the structure as a whole may be greatly reduced. However, simple mechanical methods are unsuitable for use where a potential for contamination makes it desirable for an
25 operator to be remote from a surface to be operated upon.

Various techniques are known for the surface removal of concrete, stone and similar surfaces. One such method is the heat treatment of a surface such as to degrade that
30 surface and release a surface layer.

JP 3002595 describes the removal of a concrete surface layer by crushing due to the heat generated by the use of microwaves to irradiate a contaminated surface layer.

5

EP-A-0653762 describes a method of modifying concrete using a laser by a method of ejecting surface chips, thus causing surface removal, using a laser scanned across a surface in a raster scan is disclosed. In such methods energy from laser light causes surface chips to break away due to generation of steam or thermal stresses below the surface thus effecting surface removal. This latter phenomenon of ejecting surface chips or flakes is known in the art as laser scabbling.

15

However, it has been found that some surfaces, including some types of concrete having aggregate therein, whilst successfully scabbling on a first scan, may fail to do so on areas which are adjacent a first scanned track.

20

Summary of the invention

According to a first aspect of the present invention there is provided a method of treating a surface for the removal of a surface portion thereof, the method comprising the steps of: producing a beam of laser light and obscuring a low intensity part of the laser beam before irradiating a surface location with the laser light so as to remove the surface portion.

30

According to a second aspect of the present invention there is provided an apparatus for treating a surface for the removal of a surface portion thereof, the apparatus comprising a laser source for producing a laser beam for
5 irradiating a surface location with laser light so as to remove the surface portion wherein a low intensity part of the laser beam is obscured and does not impinge upon the surface.

10 The low intensity part of the laser beam that is obscured may be a part below a threshold energy intensity for surface removal. The surface removal may be substantially by scabbling. A high intensity portion of a laser beam may be a portion above a threshold energy level intensity for
15 causing scabbling.

The laser beam for use in the invention may have an uneven radiation intensity across the beam. The laser beam may be alternatively described as laser light or laser radiation.

20

In a first embodiment of the invention the laser light may be obscured by a shadow mask. A shadow mask is a means whereby a portion of laser light incident upon the mask is substantially adsorbed by the mask or at least prevents
25 that light from impinging upon the surface location. The shadow mask may adsorb all of a low intensity portion of a laser beam.

In a second embodiment of the invention the laser light may
30 be obscured by a reflective mask. A reflective mask is a

means whereby a portion of laser light incident upon the mask is substantially reflected by the mask. The portion of laser light reflected by the mask may comprise most of a low intensity portion of the laser beam. The reflection may
5 redirect one portion of low intensity laser light to another low intensity laser light to a low intensity part of the laser beam so as to create an additional higher intensity portion of the laser beam.

10 The part of laser light reflected by the mask may comprise substantially all of a low intensity part of the laser beam. The reflection may redirect the low intensity laser light to a high intensity portion of the laser beam.

15 Effectively, the method and apparatus according to the present invention may prevent laser light which is below a threshold intensity for causing scabbling to be incident alone on a surface to be treated. Thus, such low intensity laser light may be either adsorbed before reaching the
20 surface; intensified by reflection to combine with another low intensity portion of the laser beam to form a portion which is above a threshold level to cause scabbling; or, redirected by reflection to combine with a portion of the laser beam which is already above a threshold to cause
25 scabbling.

At least two problems have been found in the prior art with surface removal by scabbling using a laser. Both problems are associated with a non-uniform power distribution, for
30 example, quasi-Gaussian, across a laser beam spot, in

particular with the presence of lower intensity parts of an incident beam of laser light on the surface to be treated. The part of a beam of laser light incident upon a surface that is above a critical energy or threshold energy level intensity for effecting scabbling gives rise to scabbling from the surface. However, a, usually peripheral part of an incident laser beam which is below the threshold energy level intensity, i.e. a part not subjecting a surface portion on which it is incident to an energy intensity above a critical value, does not give rise to surface removal by scabbling. However, such a surface portion, and adjacent similarly un-scabbled areas, may be sufficiently affected by heating from the energy of the incident laser beam that a number of processes may occur in the surface portion, such as relaxation, dehydration and chemical change. These processes can result in the affected surface no longer being amenable to subsequent surface removal by scabbling from incident laser light, even when that light is above the threshold energy level intensity for scabbling. That is at least when laser light is used in a manner whereby surface removal is otherwise effected by scabbling, i.e. the ejection of surface chips.

Furthermore a non-uniform power distribution across a laser beam incident upon a surface may result in differential surface removal by scabbling between surface portions where a highest and a lower energy, both of which are above the threshold energy level intensity, are incident. For this reason a channel with sloping sides may be formed in a surface by a scanned laser beam impinging perpendicular to

a surface. A further, adjacent, scanned track, by such a perpendicular beam may result in laser light impinging upon a sloping surface portion resulting in a lower incident energy intensity per surface area. The sloping sides may
5 therefore cause an otherwise sufficient energy intensity, per unit area, to become insufficient, i.e. to fall below a threshold energy level intensity or to scabble less surface material. As a result a whole surface when scabbled using laser light may be uneven.

10

In addition, scabbling processes using lasers may cause explosive detachment of surface portions of a material being treated, as in the scabbling of concrete. To overcome shrapnel damage to the laser and associated optics, laser
15 beams may be focussed through a relatively very small aperture, through which air may also be ejected under pressure so as to additionally prevent ingress of debris. Such focussing may serve to increase the divergence of a laser beam, due to the surface to be treated being remote
20 from the focus, and induce or increase a spread of energy intensity within a spot of incident laser light.

The method and apparatus of the invention have been found to overcome or ameliorate the known problem of areas
25 adjacent to a laser scabbled area resisting removal by scabbling on treatment with laser light of an intensity with which the adjacent area was scabbled. In addition a surface modified according to the method of the invention can be more even than when treated in a known manner.

30

Masks of the invention may comprise an aperture. The aperture may be used for permitting a high intensity part of a laser beam to pass through. Masks of the invention may be tubular. Masks of the invention may be circular in
5 cross-section. Masks of the invention may be cylindrical. Masks of the invention may comprise one or more component parts. Masks of the invention may be of adjustable size. Masks of the invention may comprise an adjustable aperture.

10 Any aperture of a mask of the invention may have the same cross section as a part of the laser beam above a threshold energy intensity for scabbling. A laser beam being focussed may change in cross section with distance. Any aperture of a mask of the invention may be the same shape as the shape
15 of a given length of a part of the laser beam. The relevant given length of laser beam for determining shape may be the laser beam at the point or region respectively at which the shadow mask is placed.

20 Use of the method of the invention may comprise the steps of irradiating a surface, adjusting a mask aperture size to adsorb a part of the laser beam below a threshold energy intensity for scabbling and irradiating a surface to cause scabbling.

25

Masks of the invention may comprise a high temperature resistant material. Masks of the invention may comprise metal or ceramic or combinations of metal and ceramic.

Shadow masks of the first aspect of the invention may comprise a non-reflective surface. The non-reflective surface may be black.

- 5 Reflective masks of the invention may preferably comprise a metal. The metal may be aluminium, steel, tungsten or stainless steel. Reflective masks of the invention may comprise a polished surface for causing reflection. Reflective masks of the invention may comprise a glass
10 mirror. Reflective masks of the invention may include a non-reflective portion that may act as a shadow mask. The non-reflective portion of a reflective mask may be an end portion of the mask adjacent to the laser head.
- 15 Masks for use in the invention may be coated. The coating may be partial. Coatings may include coatings to adsorb laser light so as to form a shadow mask part and coatings to reflect laser light so as to form a reflective mask part.
- 20 When using the method and apparatus of the invention the laser beam impinging upon a surface portion may typically be moved over the surface, either continuously or discontinuously so as to treat a whole surface area by causing scabbling. Any suitable method for moving the laser
25 beam relative to the surface being treated may be used including moving the laser, moving the object to be scabbled, moving a conduit (such as a fibre-optic cable) or optical methods such as mirrors and the like.

A laser light source for use in the invention may typically be of total energy from 0.5 kW to 4 kW.

5 A threshold energy level intensity for surface removal by scabbling for concrete may typically be in the range of $??\text{kW/mm}^2$ to $??\text{kW/mm}^2$.

10 The energy of the laser, the size of the incident spot of laser light and the residence time of a spot of laser light are interrelated and for any given surface will be optimised so as to achieve most effective surface removal. The interrelationships of the above factors are governed by established physical laws known to the person skilled in the art.

15 A suitable laser source may be a Yttrium Aluminium Garnet (YAG) laser. Laser light sources for use in the invention may have a non-uniform energy intensity in cross-section.

20 It has been found that concrete removal depths of about $??\text{mm}$ to $??\text{mm}$ may be achieved in one pass of laser light according to the method of the invention.

25 The laser beam may be transmitted to a delivery head by means of a fibre optic cable.

A delivery head for projecting a laser beam onto a surface to be treated may comprise focussing optics to focus the beam through a focal point. The optics may include means
30 for changing the direction of the laser light through a

right angle, for example. The beam and any optics may be shrouded up to the focal point. The shroud may be frusto-conical. After the focal point the beam may diverge before impinging upon a surface to be treated. In one embodiment
5 of the method of the present invention the surface to be treated may be 270mm from the focal point when optics of focal length 120mm are used giving a spot of incident laser light of around 70mm on the surface to be treated.

10 Suitable laser equipment for practising the invention is supplied by TRUMPF GmbH and Co.KG. of Stuttgart, Germany. The laser may be guided by a robotic arm.

The laser beam may effect surface removal by the effects of
15 thermal shock. The method of the invention may give no or negligible surface removal by melting or vaporisation of the surface being treated.

The method may comprise a step of wetting the surface to be
20 treated before irradiation with the laser beam.

The method may comprise a step of coating the surface to be treated before irradiation with laser light. Examples of suitable coatings are described in EP 0 653 762 A1.

25

The presence of radionuclides may affect the nature of the scabbling process and the adsorption of incident laser radiation.

The method of the invention will typically be used for decontamination in conjunction with fume extraction and other subsidiary protective processes to prevent the spread of any contamination, particularly where radioactivity is
5 involved.

The surface for treatment according to the method of the invention may be an inorganic non-metallic surface such as a concrete, i.e. a cement, e.g. a Portland cement matrix
10 having aggregate therein. The surface may alternatively comprise a natural stone such as limestone, for example.

The requirements, features and integers of the method of the first aspect of the invention apply *mutatis mutandis* to
15 the apparatus of the second aspect of the invention and *vice versa*.

In order that the present invention may be more fully understood, examples will now be given by way of
20 illustration only, with reference to the accompanying drawings, in which :

Figure 1 shows a schematic representation of radiation intensity across a laser beam;

25

Figure 2 shows a schematic representation of an incident spot of laser light;

Figure 3 shows a schematic representation of laser equipment suitable for use with an apparatus of and in the method of the invention;

5 Figure 4 shows a schematic representation of an apparatus of the invention;

Figure 5 shows a schematic representation of a shadow mask of a first embodiment of the invention;

10

Figure 6 shows a schematic representation of the effect of a shadow mask of a first embodiment of the invention upon a schematic representation of radiation intensity across a laser beam;

15

Figure 7 shows a schematic representation of a second embodiment of the invention, a reflective mask; and

20 Figure 8 which shows a schematic representation of the effect of a shadow mask of a second embodiment of the invention upon a schematic representation of radiation intensity across a laser beam.

25 In the accompanying figures like features are denoted by like reference numerals.

Description of aspects of the invention

30 A beam of laser light may be non-uniform in intensity across a width of the beam. A schematic representation of

energy intensity across a laser beam is shown in Figure 1. Figure 1 depicts a graph 2 with a y axis of radiation intensity (I) and an x axis of distance (d) across the beam. The curve 4 describes a quasi-Gaussian type energy distribution from which it may be seen that the laser beam has a central area 16 of highest energy intensity. The curve may be divided into two portions, the boundary between being defined by a threshold energy level intensity 18. A portion 6 of the curve 4 above this threshold represents part of the laser beam capable of giving rise to scabbling of a surface, the portion 8 below represents an area not capable of giving rise to scabbling of such a surface. However, the low intensity portion 8 may give rise to surface modification which makes the surface resistant to scabbling by subsequent passes with a laser beam having an energy intensity above the threshold 18.

Figure 2 depicts a representation of a laser beam, of uneven intensity profile, such as described in Figure 1 when impinged, orthogonally, upon a surface. The surface, such as one to be scabbled is represented here and in other diagrams by the plane of the paper. The spot of laser light 20 comprises a centre point 12 of highest energy intensity and an immediately surrounding area 16 of high energy intensity. The centre point 12, and area 16, form part of area 24 wherein the light is above a threshold energy intensity 18 for scabbling. Towards the periphery of the spot of laser light scabbling may be less effective (i.e. less material may be removed) until a boundary 14 is reached which corresponds to the threshold energy intensity

18 for effecting scabbling, beyond which no scabbling occurs. A further area 26 of low incident energy exists between the first boundary 14 and a nominal outer boundary of the beam and is described by line 28 beyond which point
5 incident light intensity is very low, such as may be due to scattering, for example.

A schematic representation of laser equipment suitable for use in the method of the invention is shown in Figure 3. A
10 laser light source 100, emits laser light which may be channelled along a fibre optic channel 102 to focussing optics 104. The focussing optics comprise lenses to focus the laser light to a focus 106. The laser light is shrouded by a frusto conical shroud 108, one end 110 of which
15 surrounds the focal point 106 of the laser light. The shroud serves to protect the optics and other components and forms part of an overall protective shroud (not shown) of the equipment. Compressed air is ejected through the end of the shroud 110 to also stop ingress of debris such as
20 fumes and particles. Outside the equipment the laser light diverges 112 and impinges upon a surface to be treated 114.

The laser equipment may be mounted on a robotic arm for movement about a surface to be scabbled. Alternatively a
25 robotic arm may move a laser head for emitting laser light on to a surface to be scabbled wherein the head is connected to a stationary laser source by a fibre optic cable.

Figure 4 shows a schematic representation of an apparatus 200 of the invention. Laser light from a laser source is brought to a focus 106 at which point the light leaves the protective shroud 108 and begins to diverge. As the light
5 diverges it impinges upon a shadow mask 202 comprising a hollow cylinder through which the laser light 204 partially passes. The laser light 204 impinges upon the mask and is partly adsorbed and hence a part of the divergent beam 208 which would otherwise impinge upon the surface 114 does not
10 impinge. This part of the beam is a part that is below a threshold energy intensity for scabbling and would therefore not scabble surface 114 in annular region 214. Another part 206 of the laser light 204 does not impinge upon shadow mask 202 and passes through a central aperture
15 210 in the shadow mask and so that this part 206 of the laser light 204 impinges upon the surface 114. The part of the laser light 206 which passes through the mask is all of an intensity greater than a threshold energy intensity for causing scabbling and thus the surface 114 is scabbled in a
20 circular region 212 of surface 114.

The apparatus of the invention thus enables a method of conditioning laser light for the scabbling of a surface whereby the component 214 of laser light below a threshold
25 energy intensity is prevented from impinging upon a surface by means of a shadow mask. An area of a surface being scabbled which is modified by laser light not intense enough to give rise to scabbling but which could have otherwise affected the surface such that scabbling may be
30 prevented by more intense laser light is, therefore, not

created. Thus the efficiency of surface removal by scabbling is increased by use of the method and apparatus according to the present invention.

5 Figure 5 shows a schematic representation of a shadow mask 202 of the a first embodiment of the invention. The shadow mask comprises a hollow cylinder 216. Incoming, divergent, laser light in direction D may be obscured by the end wall 250 of the cylinder or the cylinder bore 252. In the
10 example, the cylinder is elongate and is composed of a mass of around a kilogram of aluminium metal with a black coating (?) for use with a laser of 4kw intensity. However, the cylinder may be composed of any suitable metal. The diameter of the bore of the cylinder is 8cm (?) with wall
15 thickness 1cm. The shadow mask may be attached to the apparatus by brackets, stays or other means (not shown). The physical mass of the shadow mask enables a relatively high energy to be adsorbed from the incoming laser light before any thermal degradation of the mask occurs. In
20 addition the shadow mask is preferentially robust so as to withstand the impact of any debris from the scabbling process.

The mask 202 may be cooled, for example, by a water jacket
25 if desired.

The shadow mask may alternatively be made of a ceramics material.

Figure 6 shows a schematic representation of the effect of a shadow mask of a first aspect of the invention as depicted in Figure 4 upon a schematic representation of radiation intensity across a laser beam as depicted in Figure 1. Figure 6 depicts a graph 272 with a y axis of radiation intensity (I) and an x axis of distance (d) across the beam. The curve 274 describes the energy intensity profile of laser light after passing through a shadow mask 202 of the invention. Central portion 276, a portion of intensity above a threshold intensity 18 for causing scabbling is unaffected by passing through the aperture 210 of the shadow mask of Figure 5. However, low intensity light, below the threshold intensity for causing scabbling is adsorbed by the mask 202 and cannot, therefore, impinge upon the surface to be scabbled. The low energy light is no longer present as it has been obscured by the shadow mask. The width of the beam A after passing the mask is substantially the same as the aperture A of the mask on the side of the mask away from the laser source.

In practice aperture width A may not correspond exactly to the points on curves 4 and 274 where the curves intersect the line of threshold energy intensity for causing scabbling 18. However, the shadow mask aperture will not normally be greater than the above distance which defines the width of the laser beam which is above the threshold energy intensity for causing scabbling.

Figure 7 shows a schematic representation 300 of a further embodiment of the invention involving the use of a

reflective mask. Laser light from a laser source comes to a focus 106 and exits the protective shroud 108. the light then diverges before impinging upon the reflective mask 302. A part of the divergent laser light 204 no longer
5 continues on in a region 308 that it would otherwise occupy and similarly fails to impinge upon, is obscured from, the surface to be scabbled in annular region 314. This part of the laser light which no longer continues is a lower energy portion of the laser light below a threshold energy level
10 intensity for causing scabbling. The surface 114 is no longer potentially modified in region 314 such that scabbling by laser light of intensity above the threshold energy intensity for scabbling may not give rise to scabbling of the surface 114. However, the part of the
15 laser light which would form annular region 314 is reflected by the internal surface of the mask 302 to a central region of the incident laser beam 306 and impinges upon the surface to be scabbled in region 312. Some laser energy may be adsorbed by the mask 302, but however, most
20 of the energy which would otherwise have impinged on annular region 314 is reflected so as to fall on the region 312. Another part of the laser light already above a threshold energy intensity for scabbling passes through the aperture 310 of the reflective mask and impinges upon and
25 scabbles the surface 114 in circular region 312.

The effect of the reflective mask is further illustrated in Figure 7 by considering an incoming ray 320 of laser light which is part of a region of the laser beam below a
30 threshold energy intensity for causing scabbling. The ray

320 passes through the focus 106 and as the light as a whole diverges the ray impinges upon the bore 352 of the reflective mask 302. The ray is then reflected back towards the central part 306 of the laser beam and impinges upon
5 the surface to be scabbled 114 in a region being scabbled 312. Thus a portion of a laser beam otherwise ineffective for scabbling a surface contributes to such scabbling.

A significant benefit of this aspect of the invention is
10 that low energy intensity laser light is no longer lost or wasted by adsorption but is substantially reflected and reinforces the laser light capable of causing scabbling thus increasing the efficiency of the apparatus and providing a more effective method of scabbling a surface.

15

In the example, the reflective mask 302 comprises a hollow cylinder and is composed of a mass of around a kilogram of aluminium metal for use with a laser of 4kw intensity. The diameter of the bore of the cylinder is 8cm (?) with wall
20 thickness 1cm. The bore of the reflective mask is polished to improve reflectivity. The reflective mask may be attached to the apparatus by brackets, stays or other means (not shown). The physical mass of the shadow mask enables energy to be adsorbed from the incoming laser light
25 before any thermal degradation of the mask occurs. In addition the reflective mask is sufficiently robust so as to withstand the impact of any debris from the scabbling process. The end face 350 of the reflective mask 350 adjacent to the laser source may be made adsorbent to laser
30 light to avoid reflection of laser light back at the

apparatus. Alternatively, the reflective mask may be made of polished stainless steel or any other suitable materials such as a cylindrical mirror, for example.

- 5 Figure 8 which shows a schematic representation of the effect of a shadow mask of the invention as depicted in Figure 7 upon a schematic representation of radiation intensity across a laser beam as depicted in Figure 1.
- 10 Figure 8 depicts a graph 372 with a y axis of radiation intensity (I) and an x axis of distance (d) across the beam. The curve 374 describes the energy intensity profile of laser light after passing through reflective mask 302 of the invention. Curve 4 depicts the laser light intensity
- 15 across a laser beam before the light impinges upon the reflective mask 302. Low intensity portion 8 of the laser light incident upon the reflective mask is substantially reflected by the bore 352 of the reflective mask 302 into central region 324 of width A' (c.f. 306) and accounts for
- 20 the difference in energy 380 beneath energy intensity curve 374 after the reflective mask and beneath the central part 6 of energy intensity curve 4 before the reflective mask. This difference 380 represents an increase in energy efficiency of the apparatus and hence effectiveness of the
- 25 method of laser scabbling attributable to the second aspect of the invention. The second aspect of the invention therefore not only removes the low intensity portion of a laser beam by obscuring it from the surface but redirects that part of the beam so as to enhance that part of the

laser beam that can, or can as a result of the redirection, scabble the surface.

It will be noted from Figure 8 that by redirection of the low intensity part of the laser beam that the effective diameter of the beam having a threshold energy level above that intensity indicated at 18 in Figure 8 is increased from 'A' to 'A' '. Thus, the method and apparatus of the present invention makes more efficient use of the available energy in the laser beam.

The dimensions of aperture 310 of the reflective mask 302 need not correspond exactly to the dimensions corresponding to the distance A between the points on incoming laser light intensity curve 4 where the curve meets the line of threshold energy intensity for scabbling 18. Instead the diameter of aperture 310 of the reflective mask 302 may be A' a dimension greater than A. However, the reflective mask aperture 310 will not normally be significantly greater than the above distance A which defines the width of the laser beam which is above the threshold energy intensity for scabbling before the beam impinges upon the reflective mask. It is noted that the increase in energy intensity of the central part of the laser light 324, as depicted by curve 374, means that the points where line 18 of threshold energy intensity for scabbling meet the curve 374 will be further apart (A') than the corresponding distance (c.f. A) of points 22 on a graph 2 of incoming laser light before the reflective mask. The diameter of the aperture of a reflective mask may therefore be a dimension equal to the

distance between the effective width of a reflectively masked laser beam which is above a threshold energy for surface removal by scabbling.

Claims

1. A method of treating a surface for the removal of a surface portion thereof, --- comprising the steps of
5 producing a beam of laser light and obscuring a low intensity part of the laser beam before irradiating a surface location with the laser light.
2. A method of treating a surface according to claim 1
10 wherein the low intensity part of the laser beam that is obscured is a part below a threshold energy intensity for surface removal.
3. A method of treating a surface according to either claim
15 1 or claim 2 wherein the laser light is obscured by a shadow mask such that laser light incident upon the mask is substantially adsorbed by the mask.
4. A method of treating a surface according to claim 3
20 wherein the shadow mask adsorbs all of a low intensity portion of a laser beam.
5. A method of treating a surface according to either claim
25 1 or 2 wherein the laser light is obscured by a reflective mask such that light incident upon the mask is reflected by the mask.
6. A method of treating a surface according to claim 5
30 wherein the portion of laser light incident upon the mask is substantially reflected by the mask.

7. A method of treating a surface according to claim 6 wherein the portion of laser light reflected by the mask comprises most of a low intensity portion of the laser beam.

5

8. A method of treating a surface according to any one of claims 5, 6 or 7 wherein the reflection redirects low intensity laser light to another low intensity portion of the laser beam so as to create an additional high intensity portion of the laser beam.

10

9. A method of treating a surface according to any one of claims 5, 6 or 7 wherein the portion of laser light reflected by the mask comprises all of a low intensity portion of the laser beam.

15

10. A method of treating a surface according to any one of claims 5 to 10 wherein the reflection redirects low intensity laser light to a high intensity portion of the laser beam.

20

11. A method of treating a surface according to any one previous claim wherein the mask is provided with an aperture.

25

12. A method of treating a surface according to claim 11 wherein a high intensity part of a laser beam passes through the aperture.

13. A method of treating a surface according to either claim 11 or claim 12 wherein the mask is tubular.

14. A method of treating a surface according to claim 13
5 wherein the mask is cylindrical.

15. A method of treating a surface according to any one previous claim wherein the mask comprises a metal or a ceramic.
10

16. A method according to any one previous claim wherein the laser is an Yttrium Aluminium Garnet (YAG) laser.

17. A method according to any one previous claim wherein
15 the surface is a concrete surface.

18. A method according to claim 12 wherein the surface is a concrete surface contaminated with radionuclides.

20 19. A method according to any one previous claim wherein the surface portion is removed by the effects of thermal shock.

20. An apparatus for treating a surface for the removal of
25 a surface portion thereof, the apparatus comprising a laser source for producing a laser beam for irradiating a surface location with laser light so as to remove the surface portion wherein a low intensity part of the laser beam is obscured by mask means.

30

21. An apparatus for treating a surface according to claim 20 wherein the mask means comprises a shadow mask to adsorb 'low intensity' radiation.
- 5 22. An apparatus for treating a surface according to claim 21 wherein the mask means comprises a reflective mask to redirect at least a part of the 'low intensity' portion of the radiation.
- 10 23. An apparatus for treating a surface according to either one of claims 21 or 22 wherein the 'low intensity' portion of the radiation is that portion below a threshold energy level for causing scabbling.
- 15 24. An apparatus according to any one of claims 21, 22 or 23 for treating a surface wherein the mask means is coated.
- 20 25. An apparatus for treating a surface according to claim 24 wherein the coating is a light adsorbing coating.
26. An apparatus for treating a surface according to claim 24 wherein the coating is a reflective coating.
- 25 27. A method of treating a surface for the removal of a surface portion substantially as hereinbefore described with reference to the accompanying description and any one of drawings 4, 5, 6, 7 and 8.

28. An apparatus for treating a surface for the removal of a surface portion substantially as hereinbefore described with reference to the accompanying description and any one of drawings 4, 5, 6, 7 and 8.

5

Abstract

The invention provides a method and an apparatus for treating a surface for the removal of a surface portion thereof, comprising the steps of producing a beam of laser light and obscuring a low intensity part of the laser beam before irradiating a surface location with the laser light so as to remove the surface portion. The apparatus for treating a surface for the removal of a surface portion thereof, comprises a laser source for producing a laser beam for irradiating a surface location with laser light so as to remove the surface portion wherein a low intensity part of the laser beam is obscured and does not impinge upon the surface. the obscuration may be effected by a shadow mask and/or a reflective mask.

Figure 1

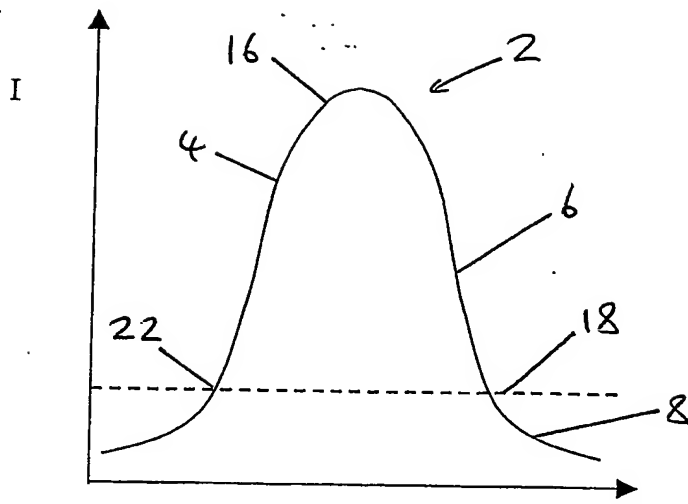


Figure 2


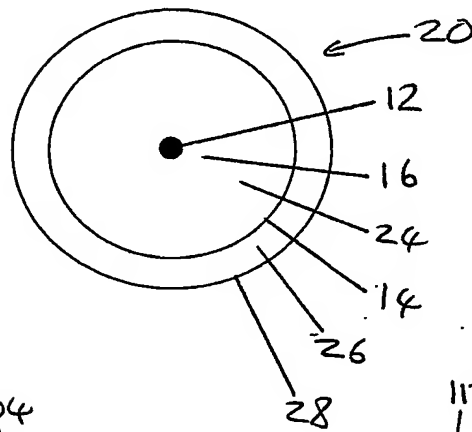


Figure 3



PCT Application

GB0304168

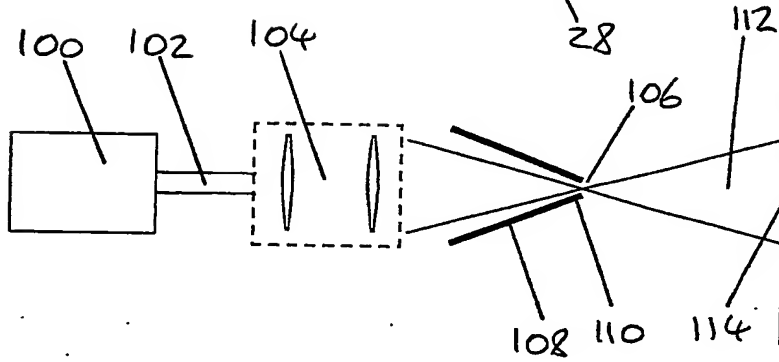

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☒ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.